


Prolunghe in PVC di tipo K con spina e presa standard (IEC)



TYPE-K

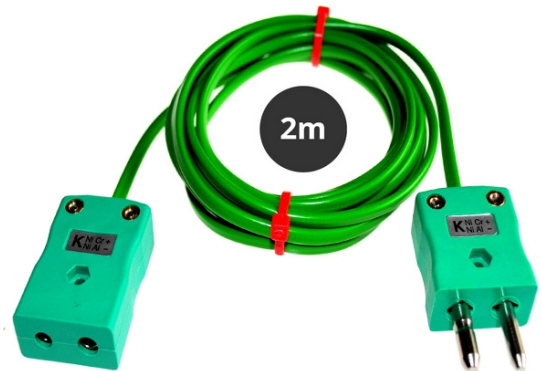

TYPE-K

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Indicazioni

Costruzione del cavo: Coppia singola 7/0.2

Cavo / filo isolato in PVC

Posato in piano, affiancato e rivestito in PVC

Classe di tolleranza 2

Grado di isolamento da -10 a 105 C.

Codice colore IEC

Connettori standard

Connettore standard con pin a spina rotondi solidi

Presa standard con contatti a termocoppia

Adatto per applicazioni industriali

I contatti sono polarizzati per evitare collegamenti errati

Temperatura massima 220C

Codice colore IEC

Specifications

Product Code	XE-7012
General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	2M, 5M, 10M, 15M
Cable Type	Flat Pair Construction
Connector Type	Thermocouple Plug & Socket
Connector Size	Standard
Core / Strands	7/0.2mm



Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Green
Drain Wire	No
Insulation Material	PVC Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	105°C
Min. Temperature	-10°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Termination Type	Standard Thermocouple Plug and Socket
Tolerance	Class 2