
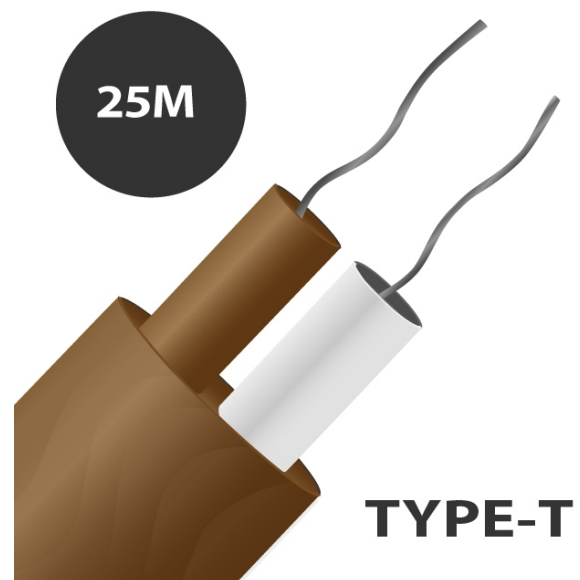
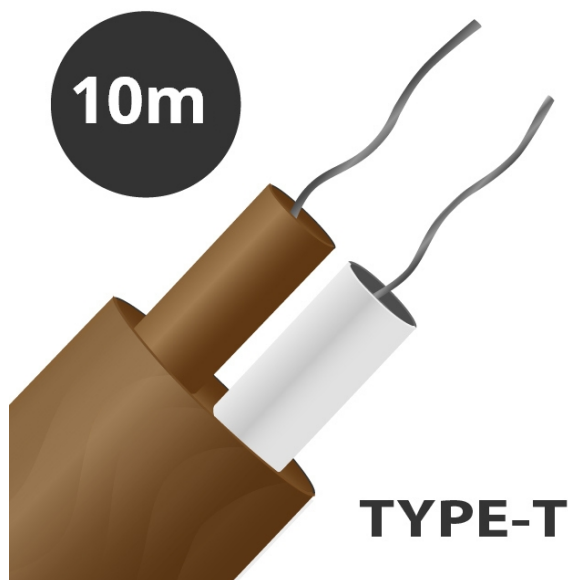


## Tipo T PTFE Isolato Flat Pair Termocoppia Cavo / Filo (IEC)

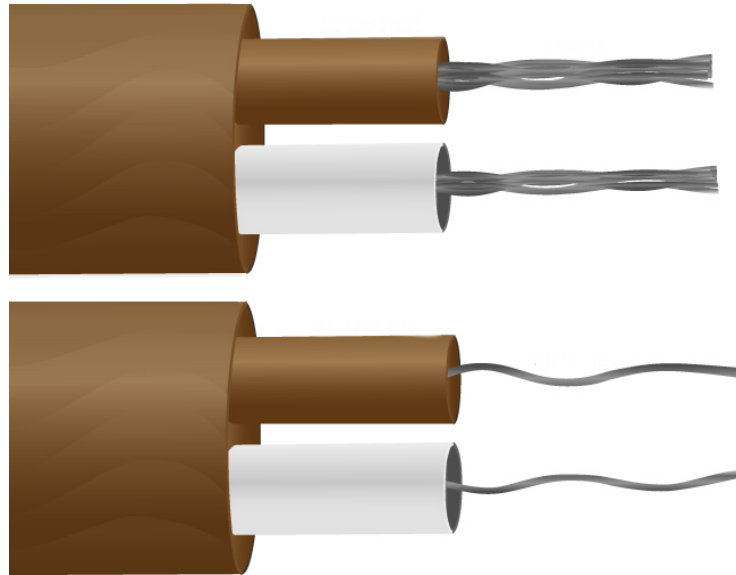

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Tipo T PTFE Isolato Flat Pair Termocoppia Cavo / Filo (IEC)**

Coppia piatta isolata in PTFE. Il PTFE ha una buona resistenza meccanica e flessibilità, resistente a oli, acidi e altri fluidi avversi.

**Indicazioni****Specifications**

<b>General Description</b>	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
<b>Cable Length</b>	10m, 25m, 50m, 100m
<b>Cable Type</b>	Flat pair cable
<b>Core / Strands</b>	1/0.3mm, 7/0.2mm , 1/0.508mm
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Conductor Cross Section 1/0.508 (mm<sup>2</sup>)</b>	0.203
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>Outer Colour</b>	Brown
<b>+ Colour</b>	Brown
<b>- Colour</b>	White
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PTFE insulated



Loop Resistance 1/0.315 (Ohms per combined metre)	6.5
Loop Resistance 1/0.508 (Ohms per combined metre)	2.5
Loop Resistance 7/0.2 (Ohms per combined metre)	2.3
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Copper
- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	T
Tolerance	Class 1