



Tipo T PTFE isolato a doppio doppio intrecciato Termocoppia Cavo / filo (IEC)

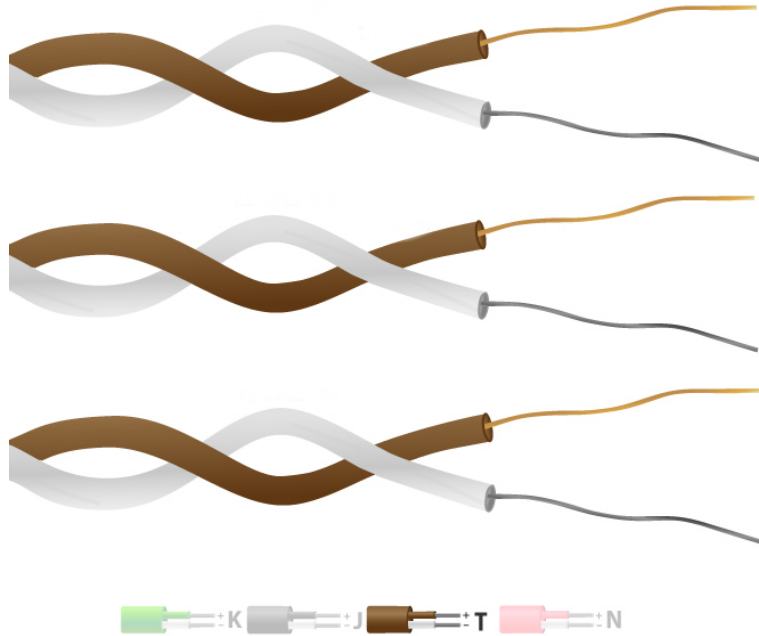


10m

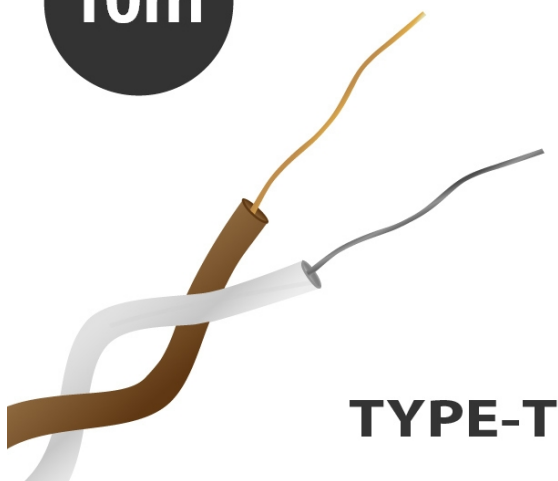

TYPE-T

50M

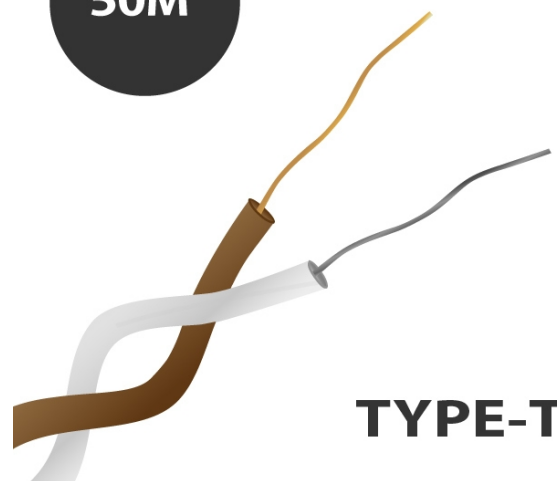

TYPE-T

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo T PTFE isolato a doppio doppino intrecciato Termocoppia Cavo / filo (IEC)

Doppio doppino intrecciato isolato in PTFE. Il PTFE ha una buona resistenza meccanica e flessibilità, resistente a oli, acidi e altri fluidi avversi.

Indicazioni**Specifications**

General Description	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Twin twisted pair for extending or making simple thermocouples
Core / Strands	1/0.2mm , 1/0.315mm, 7/0.2mm
Conductor Cross Section 1/0.2 (mm²)	0.032
Conductor Cross Section 1/0.315 (mm²)	0.078
Conductor Cross Section 7/0.2 (mm²)	0.219
+ Colour	Brown
- Colour	White
Drain Wire	No
Insulation Material	PTFE insulated

Loop Resistance 1/0.2 (Ohms per combined metre)	16.2
Loop Resistance 1/0.315 (Ohms per combined metre)	6.5
Loop Resistance 7/0.2 (Ohms per combined metre)	2.3
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Copper
- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	T
Tolerance	Class 1