
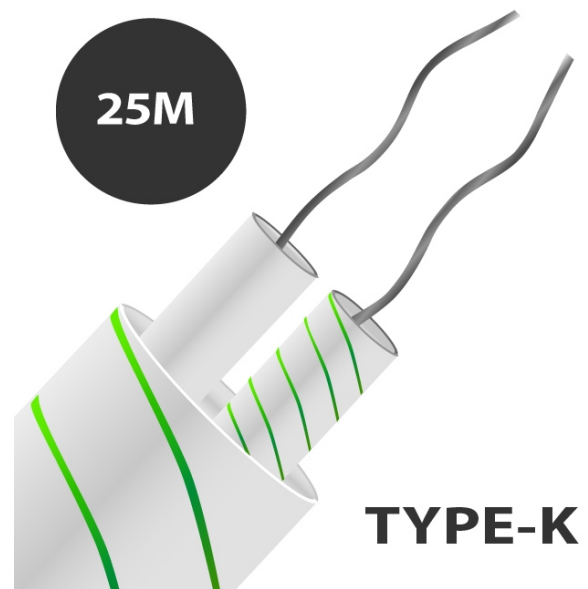
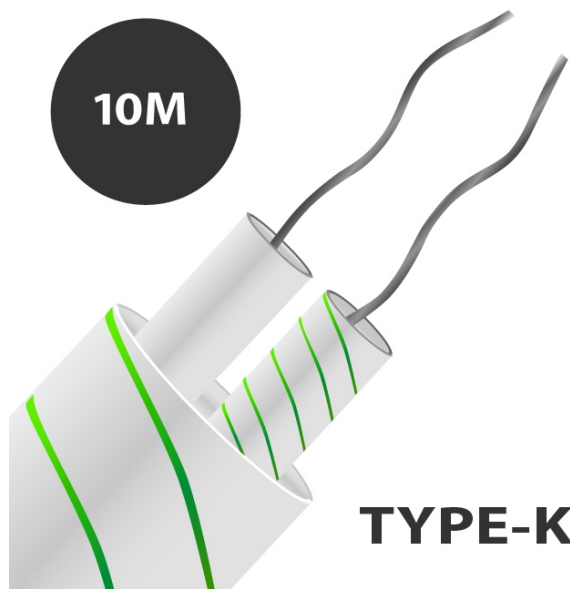


## Tipo K Isolato in fibra di vetro Coppia piatta termocoppia Cavo / Filo (IEC)

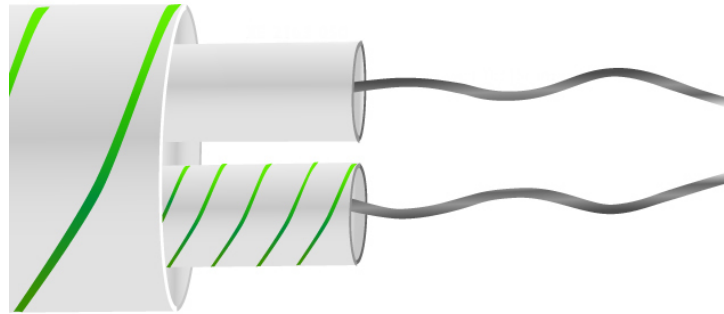

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Tipo K Isolato in fibra di vetro Coppia piatta termocoppia Cavo / Filo (IEC)**

Costruzione a coppia piatta isolata in fibra di vetro, conduttori posati piatti, fibra di vetro isolata con fibra di vetro complessiva, verniciato silconico in tutto. Buona resistenza alla temperatura ma non adatto dove sono presenti fluidi.

## Specifications

<b>General Description</b>	Good temperature range but will not prevent ingress of fluids. Fairly flexible but does not provide good mechanical protection.
<b>Cable Length</b>	5m, 10m, 25m, 50m, 100m
<b>Cable Type</b>	Flat pair cable
<b>Core / Strands</b>	1/0.3mm / 1/0.508mm / 7/02.mm / 1/0.2mm
<b>Conductor Cross Section 1/0.2 (mm<sup>2</sup>)</b>	0.032
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Conductor Cross Section 1/0.508 (mm<sup>2</sup>)</b>	0.203
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>Outer Colour</b>	Green & White
<b>+ Colour</b>	Green
<b>- Colour</b>	White
<b>Drain Wire</b>	No

<b>Insulation Material</b>	Glassfibre insulated
<b>Loop Resistance 1/0.2 (Ohms per combined metre)</b>	31.8
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	12.8
<b>Loop Resistance 1/0.508 (Ohms per combined metre)</b>	4.9
<b>Loop Resistance 7/0.2 (Ohms per combined metre)</b>	4.5
<b>Max. Temperature</b>	+350°C (short periods up to 400°C)
<b>Min. Temperature</b>	-60°C
<b>+ Conductor</b>	Nickel Chromium
<b>- Conductor</b>	Nickel Aluminium
<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to IEC-584-3
<b>Thermocouple Type</b>	K
<b>Tolerance</b>	Class 2