



## Tipo K PFA isolato doppio doppio intrecciato termocoppia cavo / filo (ANSI)

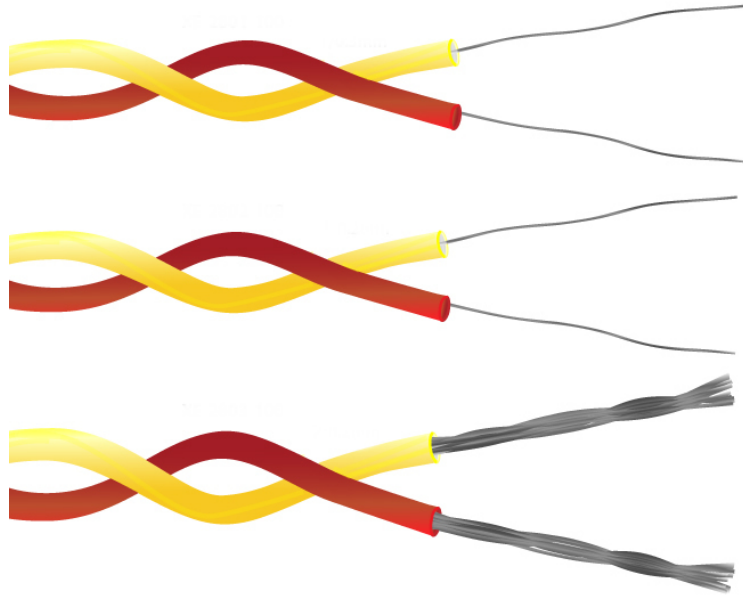


**10m**

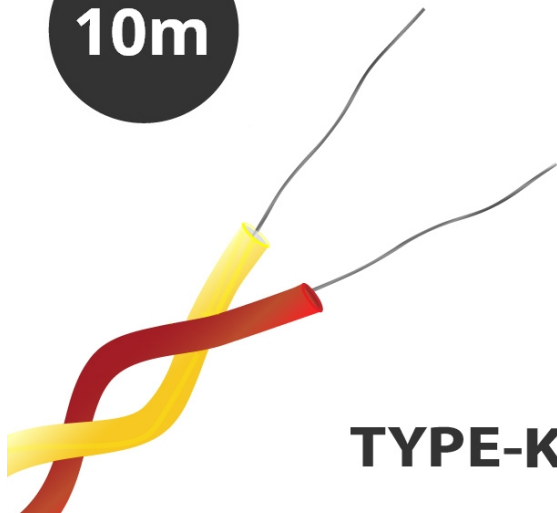

**TYPE-K**

**25M**

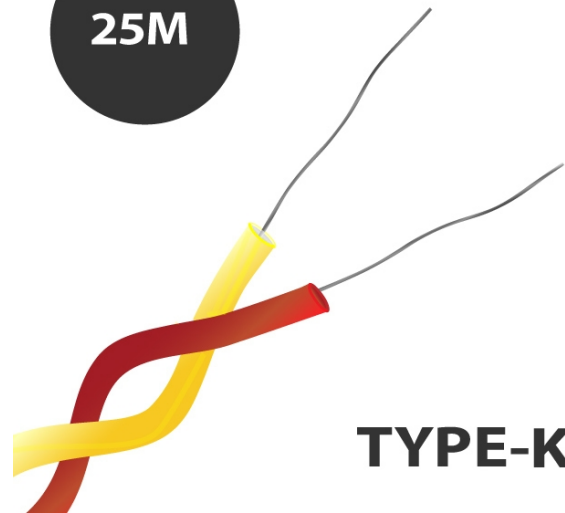

**TYPE-K**

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Tipo K PFA isolato doppio doppino intrecciato termocoppia cavo / filo (ANSI)**

PFA Teflon doppio doppino intrecciato per estendere o realizzare semplici termocoppie. Il teflonPFA ha una buona resistenza meccanica e flessibilit, resistente a oli, acidi e altri fluidi avversi, gas, vapore e pressione.

**Indicazioni**
**Specifications**

<b>Cable Length</b>	10m, 25m, 50m, 100m
<b>Cable Type</b>	Single pair of PFA insulated conductors twisted together
<b>Core / Strands</b>	1/0.2mm, 1/0.3mm or 7/0.2mm
<b>Conductor Cross Section 1/0.2 (mm<sup>2</sup>)</b>	0.032
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>+ Colour</b>	Yellow
<b>- Colour</b>	Red
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PFA Teflon®
<b>Loop Resistance 1/0.2 (Ohms per combined metre)</b>	31.8
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	12.8



<b>Loop Resistance 7/0.2 (Ohms per combined metre)</b>	4.5
<b>Max. Temperature</b>	+260°C
<b>Min. Temperature</b>	-75°C
<b>+ Conductor</b>	Nickel Chromium
<b>- Conductor</b>	Nickel Aluminium
<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to ANSI MC96.1
<b>Thermocouple Type</b>	K
<b>Tolerance</b>	Class 1