





LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Tipo T PFA Isolato Twin Twisted Coppia Cavo / Cavo (ANSI)

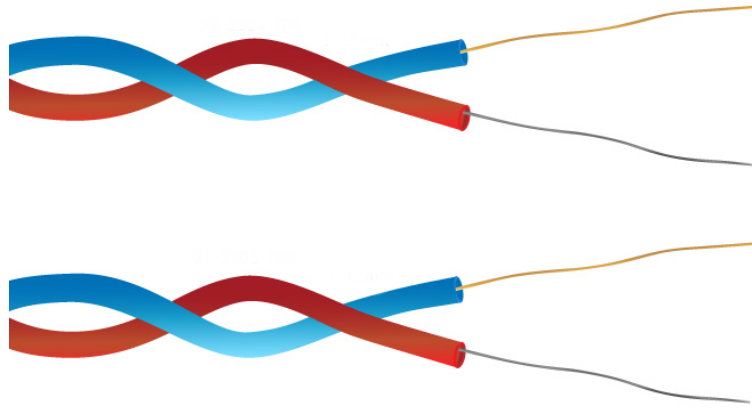


10m

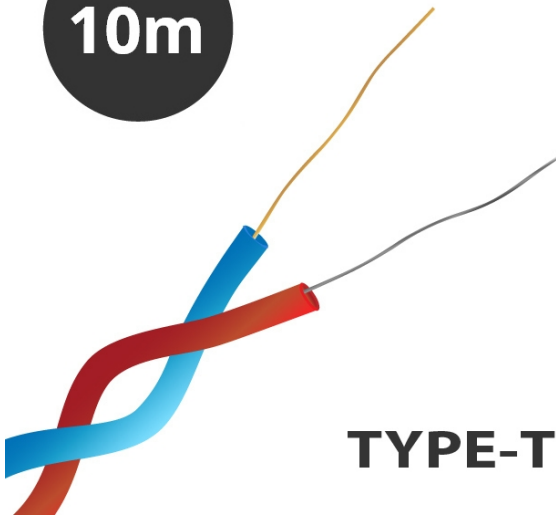

TYPE-T

50M

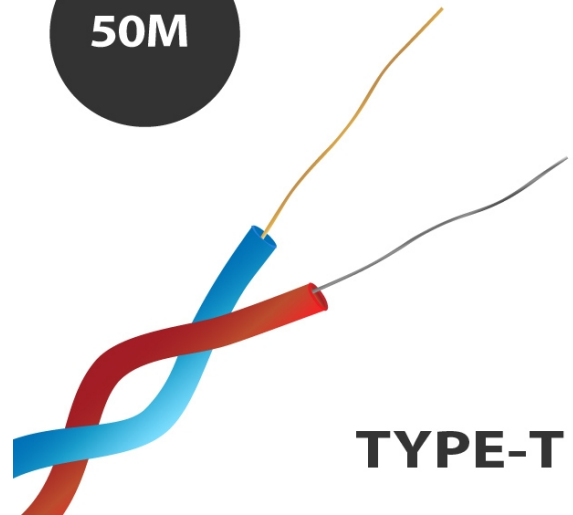

TYPE-T

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo T PFA Isolato Twin Twisted Coppia Cavo / Cavo (ANSI)

PFA Teflon® coppia intrecciata gemella per estendere o realizzare semplici termocoppie. PFA Teflon® ha una buona resistenza meccanica e flessibilità, resistente agli oli, agli acidi e ad altri fluidi avversi, gas, vapore e pressione.

Indicazioni
Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Single pair of PFA insulated conductors twisted together
Core / Strands	1/0.2mm, 1/0.3mm
Conductor Cross Section 1/0.2 (mm²)	0.032
Conductor Cross Section 1/0.315 (mm²)	0.078
+ Colour	Blue
- Colour	Red
Drain Wire	No
Insulation Material	PFA Teflon®
Loop Resistance 1/0.2 (Ohms per combined metre)	16.2
Loop Resistance 1/0.315 (Ohms per combined metre)	6.5



Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Copper
- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to ANSI MC96.1
Thermocouple Type	T
Tolerance	Class 1