


## Schermo in rame stagnato a 4 nuclei isolato in PFA, cavo / filo del sensore PRT

**10M**

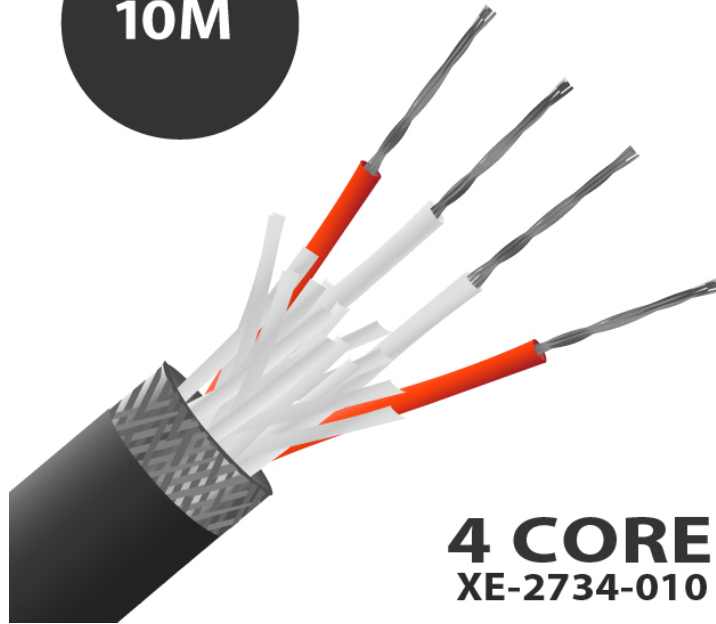


**4 CORE**  
XE-2734-010

**25M**



**4 CORE**  
XE-2734-025

**10M**

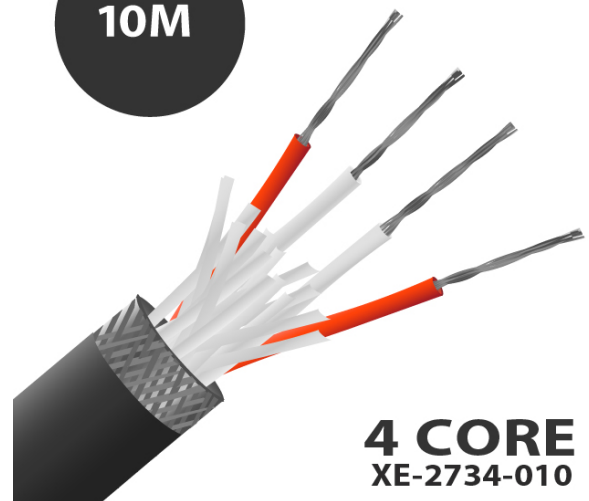

**4 CORE**  
XE-2734-010

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Schermo in rame stagnato a 4 nuclei isolato in PFA, cavo / filo del sensore PRT**

Alta temperatura a 260 C, costruzione in teflon PFA estruso. Comunemente usato per termometri Pt100, adatto anche con altri tipi come Pt130, Pt500 e Pt1000

**Indicazioni****Specifications**

<b>General Description</b>	PFA insulated 7/0.2mm tin plated copper conductors, twisted cores, tin plated copper braided screen with PFA insulated outer jacket
<b>Cable Length</b>	10, 25m
<b>Cable Type</b>	PFA Teflon® construction
<b>Core / Strands</b>	7/0.2mm
<b>Insulation Material</b>	PFA Insulated
<b>Max. Temperature</b>	+260°C
<b>Min. Temperature</b>	-75°C
<b>Number of Wires</b>	4
<b>Standards Met</b>	Cores colour coded Red & White in accordance with IEC-751, black outer jacket