


Termocoppia con ugello IEC, cavo isolato in fibra di vetro con treccia in acciaio inox che termina in code nude, spina miniaturizzata o standard - tipo K, J

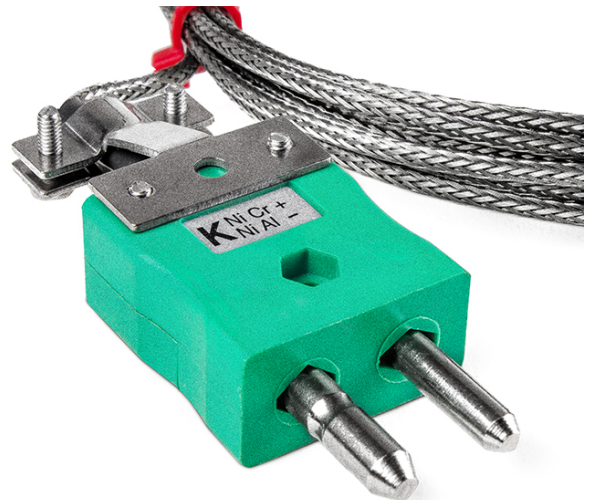

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Termocoppia alloggiata in un bullone filettato in acciaio inox

Filettatura M6x1mm

Punta con messa a terra per una risposta rapida

Nominale 350°C

Piombo isolato in fibra di vetro da 2 metri con sovrabraidato in acciaio inossidabile, 7/0,2 mm

Tipo J o K disponibili

Tipo K con opzione di terminazione spina standard

Specifications

General Description	Thermocouple housed in a stainless steel threaded bolt
Thermocouple Type	K or J
Thermocouple Junction	Grounded hot junction for fast response, M6x1mm thread
Probe Diameter	4.5mm
Probe Length	150mm
Cable Length	1, 2 or 5m
Cable Type	Glassfibre insulated lead with stainless steel overbraid
Core / Strands	7/0.2mm
Cable Termination	Bare wire or standard plug
Termination Type	Bare tails, Miniature or Standard Plug (with cable clamps)
Max. Temperature	+350°C
Min. Temperature	-60°C
Standards Met	IEC
Dimensions	25x13mm shim (0.2mm thick)



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Thread	M6 x 1mm thread
--------	-----------------