


**Termocoppia con ugello IEC, cavo isolato in fibra di vetro con treccia in acciaio inox che termina in code nude, spina miniaturizzata o standard - tipo**

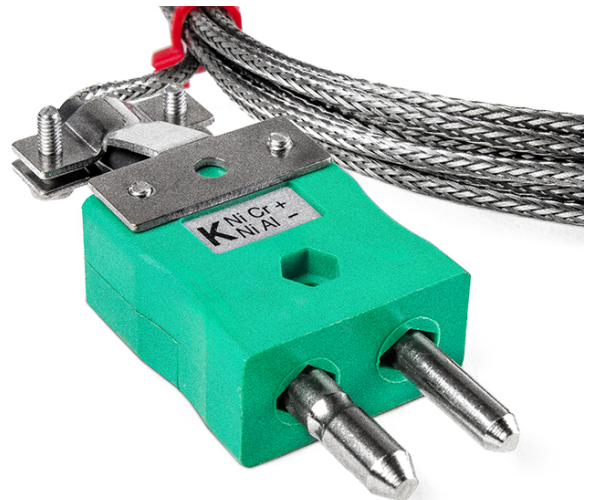

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Termocoppia alloggiata in un bullone filettato in acciaio inox

Filettatura M6x1mm

Punta con messa a terra per una risposta rapida

Nominale 350°C

Piombo isolato in fibra di vetro da 2 metri con sovrabraidato in acciaio inossidabile, 7/0,2 mm

Tipo J o K disponibili

Tipo K con opzione di terminazione spina standard

## Specifications

|                              |  |
|------------------------------|--|
| <b>General Description</b>   | Thermocouple housed in a stainless steel threaded bolt     |
| <b>Thermocouple Type</b>     | K or J   |
| <b>Thermocouple Junction</b> | Grounded hot junction for fast response, M6x1mm thread     |
| <b>Probe Diameter</b>        | 4.5mm  |
| <b>Probe Length</b>          | 150mm  |
| <b>Cable Length</b>          | 1, 2 or 5m   |
| <b>Cable Type</b>            | Glassfibre insulated lead with stainless steel overbraid   |
| <b>Core / Strands</b>        | 7/0.2mm  |
| <b>Cable Termination</b>     | Bare wire or standard plug                                 |
| <b>Termination Type</b>      | Bare tails, Miniature or Standard Plug (with cable clamps) |
| <b>Max. Temperature</b>      | +350°C   |
| <b>Min. Temperature</b>      | -60°C  |
| <b>Standards Met</b>         | IEC  |
| <b>Dimensions</b>            | 25x13mm shim (0.2mm thick)                                 |



# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

|        |                 |
|--------|-----------------|
| Thread | M6 x 1mm thread |
|--------|-----------------|