


Termocoppia a isolamento minerale con potenziometro filettato e 100 mm di cavo IEC a doppia torsione isolato in PFA - Tipi K, J, T, N

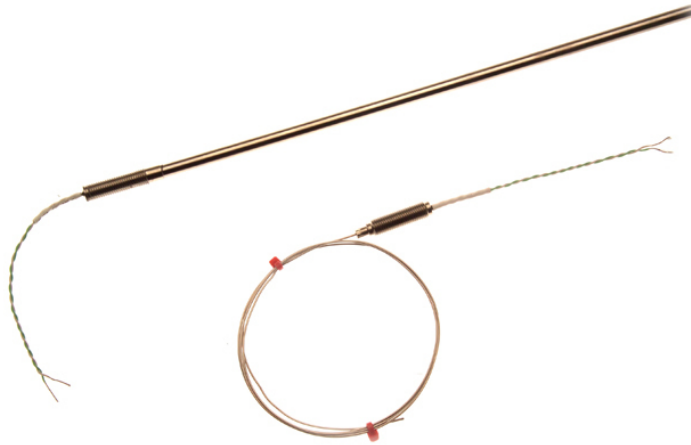

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Termocoppia a isolamento minerale in varie lunghezze terminata con 100 mm, doppia treccia isolata in PFA, IEC 7/0,2 mm.

Hai bisogno di calibrare il tuo sensore di temperatura?

Tracciabile secondo gli standard di calibrazione ISO17025 (UKAS), Labfacility offre la possibilità di scegliere tra una calibrazione tracciabile a 3 o 5 punti utilizzando la nostra struttura di calibrazione interna.

Tieni presente che se aggiungi un'opzione di calibrazione al tuo ordine, verrai contattato per informazioni sulla consegna.

Indicazioni

Specifications

General Description	Mineral insulated thermocouple in various lengths terminated with 100mm,PFA insulated twin twisted IEC,7/0.2mm.
Sensor Type	Mineral Insulated
Thermocouple Type	K,J,T,N
Element/hot junction	Single element, junction insulated from sheath (offers protection against spurious electrical signals)
Probe Diameter	1.0, 1.5, 3.0, 4.5 & 6.0mm
Probe Length	150, 250, 500, 1000, 1500 & 2000mm
Sheath Material	K - Stainless steel 310, J - Stainless steel 321, T - Stainless steel 316, N - Nicrosil
Pot Type	M8 x 1.0mm fine pitch threaded pot seal (200°C)
Cable Length	100mm
Cable Type	PFA insulated twin twisted IEC
Core / Strands	7/0.2mm



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Termination Type	Bare tails
Max. Temperature	K +1100°C for 1.5 & 3.0mm diameters +750°C for 1.0mm diameter, J +760°C, T +400°C, N +1300°C.
Min. Temperature	K -40°C, J -100°C, T -100°C, N -100°C
Standards Met	In accordance with IEC 584