


Termocoppia a isolamento minerale con guarnizione a vaso semplice e cavo ANSI isolato in PFA - Tipi K

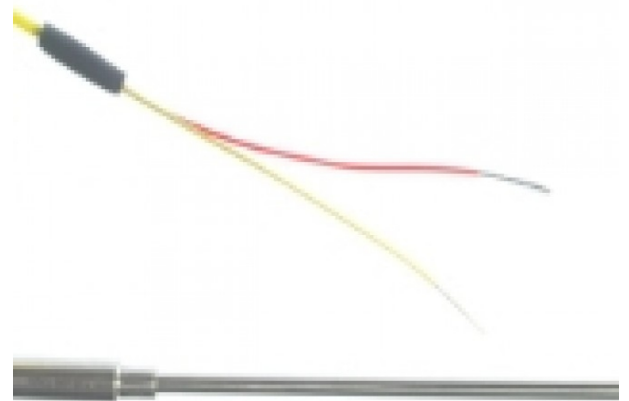

150 mm

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Hai bisogno di calibrare il tuo sensore di temperatura?

Tracciabile secondo gli standard di calibrazione ISO17025 (UKAS), Labfacility offre la possibilità di scegliere tra una calibrazione tracciabile a 3 o 5 punti utilizzando la nostra struttura di calibrazione interna.

Tieni presente che se aggiungi un'opzione di calibrazione al tuo ordine, verrai contattato per informazioni sulla consegna.

Indicazioni

Specifications

| | |
|------------------------------|--|
| General Description | Highly flexible, sheath can be bent/formed to suit many applications and processes |
| Thermocouple Type | K |
| Thermocouple Junction | Insulated hot junction |
| Probe Diameter | 1.0, 1.5, 3.0, 4.5 & 6.0 mm diameters available |
| Sheath Material | 310 stainless steel sheath |
| Pot Type | Plain pot seal (200°C) |
| Cable Length | 1m |
| Cable Type | PFA Teflon® insulated flat pair cable and tails (colour coded to ANSI MC96.1) |
| Core / Strands | 7/0.2mm |
| Cable Termination | Bare Tails |
| Max. Temperature | +1100°C (+750°C for 1.0mm) |
| Standards Met | colour coded to ANSI MC96.1 |