



Tipo N Fibra di vetro Isolante Coppia Piatta Cavo / Cavo (IEC)

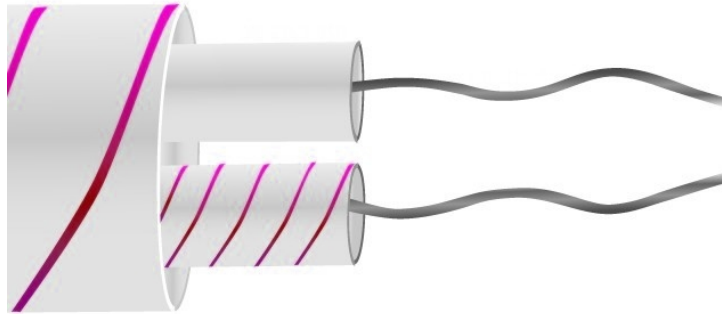


10m

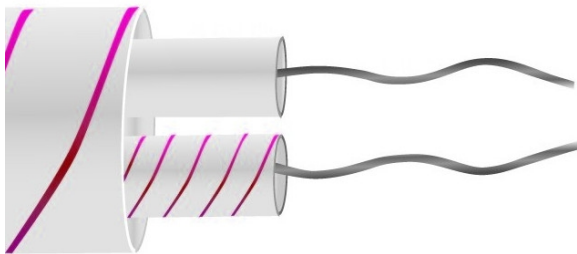

TYPE-N

25M

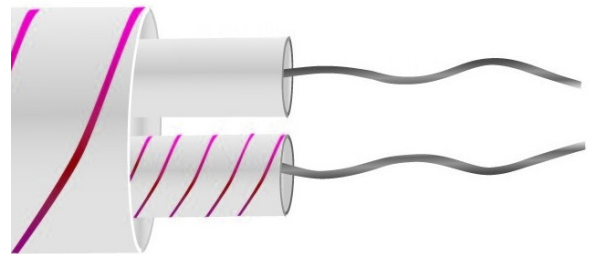

TYPE-N

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo N Fibra di vetro Isolante Coppia Piatta Cavo / Cavo (IEC)

Fibra di vetro isolato costruzione coppia piatta, conduttori posati piatta, fibra di vetro isolato con fibra di vetro in tutto, verniciato in silicone in tutto. Buona resistenza alla temperatura ma non adatta dove sono presenti fluidi.

Specifications

General Description	Good temperature range but will not prevent ingress of fluids. Fairly flexible but does not provide good mechanical protection.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Flat pair cable
Core / Strands	1/0.315mm
Conductor Cross Section 1/0.315 (mm²)	0.078
Outer Colour	Pink & White
+ Colour	Pink
- Colour	White
Drain Wire	No
Insulation Material	Glassfibre insulated
Loop Resistance 1/0.315 (Ohms per combined metre)	17.7
Max. Temperature	+350°C (short periods up to 400°C)
Min. Temperature	-60°C
+ Conductor	Copper
- Conductor	Nisil



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	N
Tolerance	Class 2