




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Cavo / filo per termocoppia schermato in Mylar isolato in PVC di tipo N (IEC)

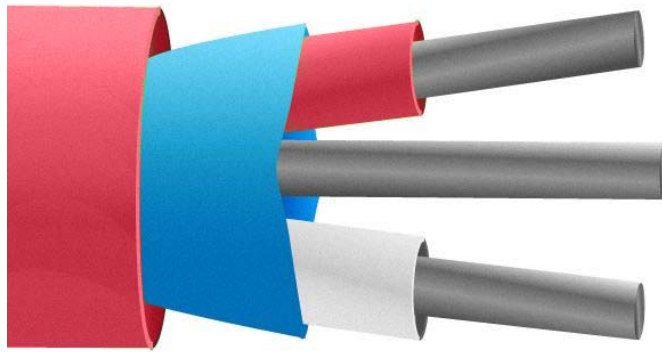

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cavo / filo per termocoppia schermato in Mylar isolato in PVC di tipo N (IEC)

Il cavo di compensazione assomiglia alla caratteristica termoelettrica della termocoppia pertinente in un intervallo di temperatura ambiente limitato, tipicamente da 0 a 80 C. Poich questi cavi sono realizzati con materiali a basso costo, possibile ottenere risparmi sui costi delle installazioni dell'impianto rispetto alla prolunga per termocoppia.

Indicazioni
Specifications

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Twisted cores & screened construction for reduced electrical noise
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Pink
+ Colour	Pink
- Colour	White
Drain Wire	Yes
Insulation Material	PVC Insulated with a mylar screen
Loop Resistance 7/0.2 (Ohms per combined metre)	6.2
Max. Temperature	+105°C
Min. Temperature	-10°C
+ Conductor	Nicrosil

- Conductor	Nisil
Screen	Yes
Screen Type	Mylar
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	N
Tolerance	Class 2