


3 core PFA isolated, screen in same stagnated, cavo / filo sensore PRT

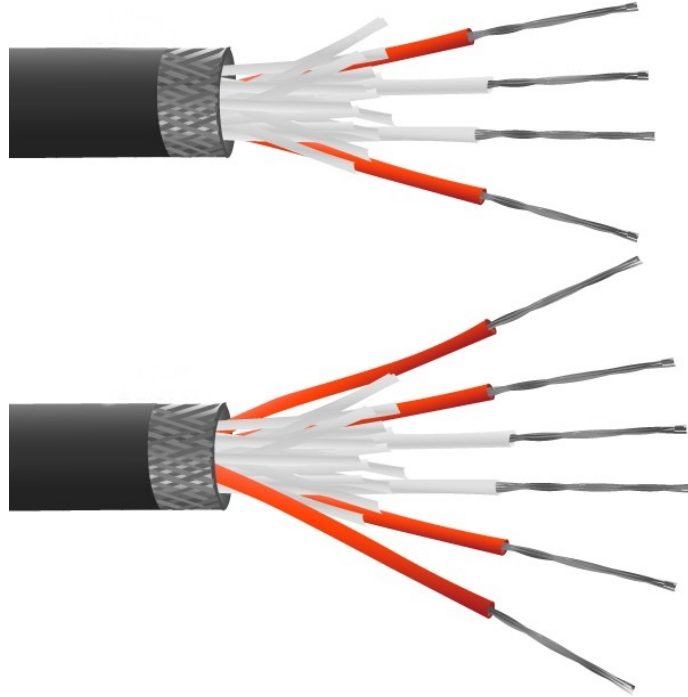

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

3 core PFA isolato, schermo in rame stagnato, cavo / filo sensore PRT

Alta temperatura a 260 C, costruzione in teflon PFA estruso. Comunemente usato per termometri Pt100, adatto anche con altri tipi come Pt130, Pt500 e Pt1000

Indicazioni**Specifications**

General Description	PFA insulated 7/0.2mm tin plated copper conductors, twisted cores, tin plated copper braided screen with PFA insulated outer jacket
Cable Length	10, 25, 50, 100m
Cable Type	PFA Teflon® construction
Core / Strands	7/0.2mm
Insulation Material	PFA Insulated
Max. Temperature	+260°C
Min. Temperature	-75°C
Number of Wires	3
Standards Met	Cores colour coded Red & White in accordance with IEC-751, black outer jacket