

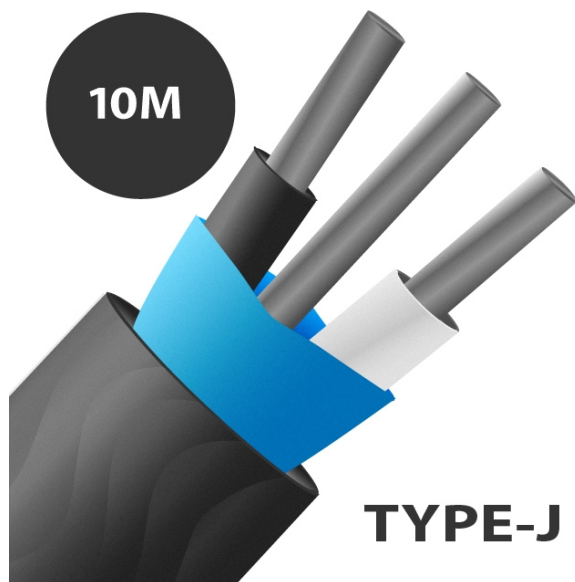


Tipo J Cavo / filo termocoppia schermato mylar isolato in PVC (IEC)

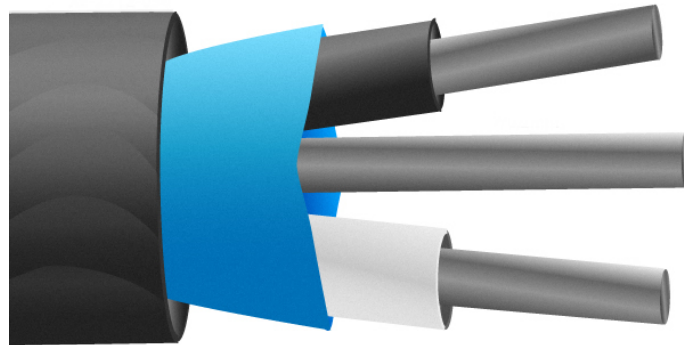

TYPE-J

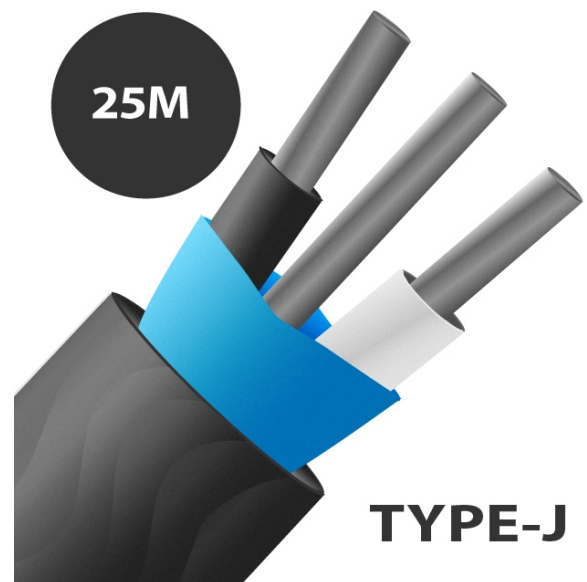

TYPE-J

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo J Cavo / filo termocoppia schermato mylar isolato in PVC (IEC)

Il cavo di compensazione assomiglia alla caratteristica termoelettrica della termocoppia pertinente in un intervallo di temperatura ambiente limitato, in genere da 0 ° a 80 ° C. Poiché questi cavi sono realizzati con materiali a basso costo, è possibile ottenere risparmi sui costi sulle installazioni dell'impianto rispetto al vero cavo di prolunga della termocoppia in esecuzione.

Indicazioni
Specifications

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10, 25, 50, 100m
Cable Type	Twisted cores & screened construction for reduced electrical noise
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Black
+ Colour	Black
- Colour	White
Drain Wire	Yes
Insulation Material	PVC Insulated with a mylar screen
Loop Resistance 7/0.2 (Ohms per combined metre)	2.7
Max. Temperature	+105°C
Min. Temperature	-10°C

+ Conductor	Iron
- Conductor	Constantan
Screen	Yes
Screen Type	Mylar
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	J
Tolerance	Class 2