




# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

**Guarnizione liscia per pentole da 0,75 mm di diametro con 1 metro di piombo isolato in PFA, coppia piatta da 7/0,2 mm con code IEC - Isolata o messa a terra**

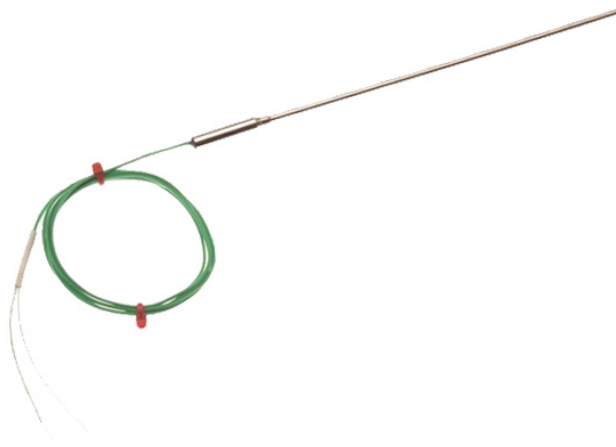

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Guarnizione liscia con 1 metro di piombo isolato in PFA, coppia piatta da 7/0,2 mm con code.

Le sonde a termocoppia con giunto di transizione di diametro fine hanno la guaina crimpata a un cilindro in acciaio inossidabile sigillato con resina epossidica e dotato di un filo conduttore isolato in PFA.

Le giunzioni delle termocoppie sono disponibili con messa a terra, per un tempo di risposta pi rapido e un costo inferiore; o isolato, per l'isolamento elettrico della termocoppia dalla guaina.

Se hai bisogno di quantit maggiori, invia un'e-mail [sales@labfacility.com](mailto:sales@labfacility.com) o telefona alla nostra linea di vendita 01243 871280.

### **Hai bisogno di calibrare il tuo sensore di temperatura?**

Tracciabile secondo gli standard di calibrazione ISO17025 (UKAS), Labfacility offre la possibilit di scegliere tra una calibrazione tracciabile a 3 o 5 punti utilizzando la nostra struttura di calibrazione interna.

**Tieni presente che se aggiungi un'opzione di calibrazione al tuo ordine, verrai contattato per informazioni sulla consegna.**

### **Indicazioni**

## **Specifications**

<b>General Description</b>	Plain pot seal (200°C) with 1 Metre of PFA insulated lead, 7/0.2mm flat pair with tails.
<b>Sensor Type</b>	Mineral Insulated
<b>Thermocouple Type</b>	K
<b>Element/hot junction</b>	Single element, junction insulated or grounded from sheath
<b>Probe Diameter</b>	0.75mm
<b>Probe Length</b>	50, 100,150, 250mm
<b>Sheath Material</b>	K - Stainless steel 316
<b>Pot Type</b>	Plain (+200°C)
<b>Cable Length</b>	1M



<b>Cable Type</b>	PFA Teflon® insulated flat pair cable and tails (colour coded to IEC 584)(Max Temp 250°C)
<b>Core / Strands</b>	7/0.2mm
<b>Termination Type</b>	Bare Tails
<b>Max. Temperature</b>	+750°C
<b>Min. Temperature</b>	-100°C
<b>Tolerance</b>	Class 1
<b>Standards Met</b>	In accordance with IEC 584